



Build Jack Orman's **Mosfet Booster** on this layout. ©Jack Orman. <http://www.muzique.com/> . I've included RG's Millennium bypass circuit to the board. <http://www.geofex.com> . Off board components except for the potentiometers are not shown on the layout. Trademarks are property of their owners.

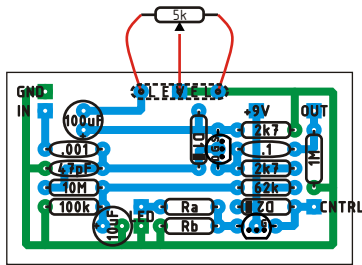

LAYOUT

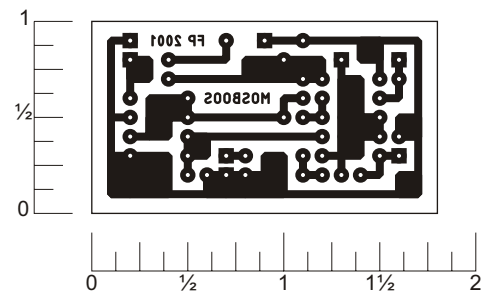

READY TO TRANSFER

Parts List

Resistors

- 1 - 62k
- 1 - 100k
- 1 - 10M
- 2 - 2k7
- 1 - 1M
- Ra - 4k7
- Rb - 22k
- Pots**
- 1 - 5k lin.

Capacitors

- 1 - 47pF
- 1 - 0.001μF
- 1 - 0.1μF
- 1 - 10μF
- 1 - 100μF

Other

- D1 - 9.1v Zener
- D2 - 1N914
- Q1 - BS170
- Q2 - 2N5485

Schematic

